2024 POOL PRODUCT GUIDE



PRISM


HARDSCAPES






Sorrento


SPECIFICATIONS	
Diameter	33"
Height	18"
Water Flow	15 GPM
Connection	¾" NPT
Burner Size	15" 6-spoke/65,000-85,000 BTUs (ML/E)
Weight	196 lbs.
Fuel Source	Liquid Propane or Natural Gas
Ignition	PH-Ignite (Electronic)/Key Valve (match lite)
Material	Glass fiber reinforced concrete
Media	Lava rock






Lombard-P

SPECIFICATIONS	
Length/Width	29"
Height	10"
Water Flow	15 GPM
Connection	¾" NPT
Burner Size	15" 6-spoke/65,000-85,000 BTUs (ML/E)
Weight	90 lbs.
Fuel Source	Liquid Propane or Natural Gas
Ignition	PH-Ignite (Electronic)/Key Valve (match lite)
Material	Glass fiber reinforced concrete
Media	Lava rock

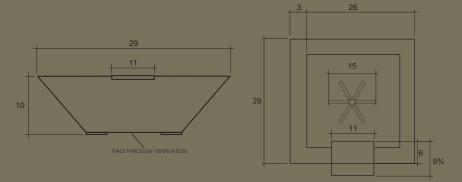


Lombard-P Tall

SPECIFICATIONS	
Length/Width	32"
Height	15¾"
Water Flow	15 GPM
Connection	¾" NPT
Burner Size	15" 6-spoke/65,000-85,000 BTUs (ML/E)
Weight	280 lbs.
Fuel Source	Liquid Propane or Natural Gas
Ignition	PH-Ignite (Electronic)/Key Valve (match lite)
Material	Glass fiber reinforced concrete
Media	Lava rock

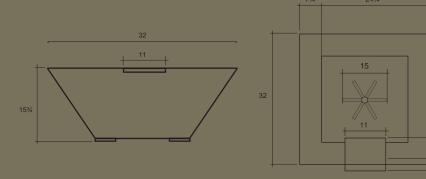


Ibiza


SPECIFICATIONS		
311/4"		
16¼"		
15 GPM		
¾" NPT		
15" 6-spoke/65,000-85,000 BTUs (ML/E)		
176 lbs.		
Liquid Propane or Natural Gas		
PH-Ignite (Electronic)/Key Valve (match lite)		
Glass fiber reinforced concrete		
Lava rock		

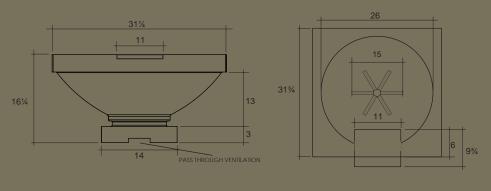

Toscano


SPECIFICATIONS	
Diameter	33"
Height	18¼"
Water Flow	15 GPM
Connection	¾" NPT
Burner Size	15" 6-spoke/65,000-85,000 BTUs (ML/E)
Weight	180 lbs.
Fuel Source	Liquid Propane or Natural Gas
Ignition	PH-Ignite (Electronic)/Key Valve (match lite)
Material	Glass fiber reinforced concrete
Media	Lava rock






Verona


SPECIFICATIONS	
Diameter	32½"
Height	14¾"
Water Flow	15 GPM
Connection	¾" NPT
Burner Size	15" 6-spoke/65,000-85,000 BTUs (ML/E)
Weight	140 lbs.
Fuel Source	Liquid Propane or Natural Gas
Ignition	PH-Ignite (Electronic)/Key Valve (match lite)
Material	Glass fiber reinforced concrete
Media	Lava rock






Moderno 2-P

SPECIFICATIONS	
29"	
12"	
15 GPM	
¾" NPT	
15" 6-spoke/65,000-85,000 BTUs (ML/E)	
110 lbs.	
Liquid Propane or Natural Gas	
PH-Ignite (Electronic)/Key Valve (match lite)	
Glass fiber reinforced concrete	
Lava rock	







We believe in spaces that are designed for living, making memories, and enjoying life.



Fire



Water



Fire & Water



Lombard-P Tall



Lombard-P



Verona



Ibiza



Moderno 2-P



Toscano



PH-Ignite Electronic Ignition System

SMART, SAFE, CONVENIENT

Hassle-Free Ignition, Zero Worries

12 VAC Inlet Power

Compliant with National Electrical code 2014, article 68.

May be installed within five feet of pool water.

Weatherproof/Anti-Corrosion Enclosure

Protects internal components from harsh weather and is built to last.

Electronic Ignition

Convenient fire feature lighting and instant flame monitoring.

Hot Surface Ignition


Robust and reliable ignition.

Waterproof Pilot Connector

Corrosion-proof electrical connection.

Compact Design

Conveniently fits into your fire feature.

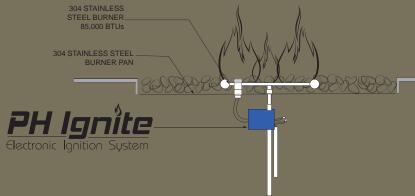



FIRE FEATURE COLOR OPTIONS



FIRE MEDIA OPTIONS







PRISMHARDSCAPES.COM

